

Newdeal LUBRICATOR

Lubricator with high lubrication stability.


- Quantity of lubricant proportioned to air flow
- Micrometric regulation of lubricant flow
- Activates at low flow rates
- All-round oil level viewing




| TECHNICAL DATA | LUB ND 1/4" | LUB ND 3/8" | LUB ND 1/2" | LUB ND 3/4" | LUB ND 1" |
|---|---|-------------|-------------|-------------|-----------|
| Threaded port | 1/4" | 3/8" | 1/2" | 3/4" | 1" |
| Type of lubrication | mist | | | | |
| Bowl capacity | 50 | 150 | 380 | | |
| Max. inlet pressure | 1.8 MPa - 18 bar - 261 psi | | | | |
| Flow rate at 6.3 bar (0.63 MPa ÷ 91 psi) | 700 | 3000 | 12800 | | |
| ΔP 0.5 bar (0.05 MPa ÷ 7 psi) | 25 | 107 | 452 | | |
| Flow rate at 6.3 bar (0.63 MPa ÷ 91 psi) | 1100 | 4300 | 16000 | | |
| ΔP 1 bar (0.1 MPa ÷ 14 psi) | 39 | 153 | 565 | | |
| Fluid | Filtered compressed air | | | | |
| Max temperature at 1 MPa; 10 bar; 145 psi | 50°C - 122°F | | | | |
| Weight | 0.4 | 0.9 | 1.3 | | |
| Wall fixing screws | M4x40 | M4x55 | M6x75 | | |
| Mounting position | Vertical | | | | |
| Notes: | <ul style="list-style-type: none"> • Use the screw provided to set the drip rate to drop every 300-600 NI. • Fit the lubricator as close as possible to the point of use • Fill the bowl with oil before pressurizing the system • Do not use cleaning oil, brake fluid or solvents in general • Recommended lubricants: ISO and UNI FD22 - E.g. Energol HLP 22 (BP) - Spinesso 22 (Esso) - Mobil DTE 22 (Mobil) - Tellus Oil 22 (Shell) | | | | |
| On request: | <ul style="list-style-type: none"> • Automatic filling lubricator and minimum level lubricator. | | | | |


COMPONENTS:

- ① Zamak body
- ② Rilsan oil suction pipe
- ③ Aluminium bowl
- ④ Clear technopolymer bowl
- ⑤ Filter
- ⑥ Technopolymer plug
- ⑦ Venturi NBR diaphragm
- ⑧ OT 58 brass oil flow regulation needle
- ⑨ Clear technopolymer cover
- ⑩ NBR gaskets

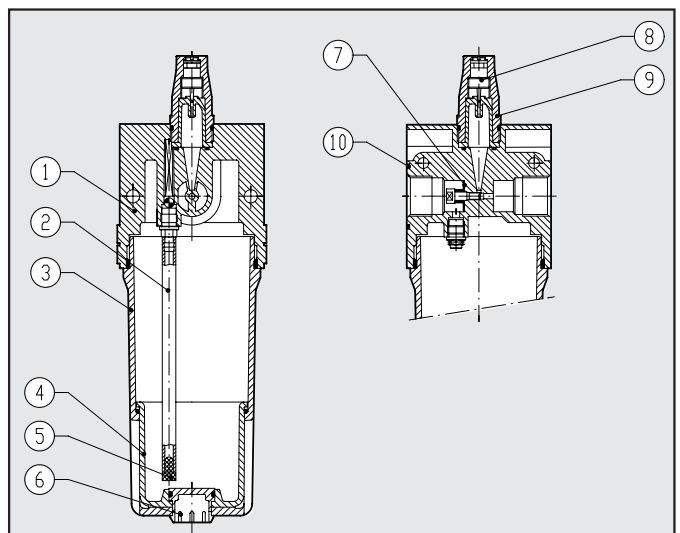





FLOW CHARTS

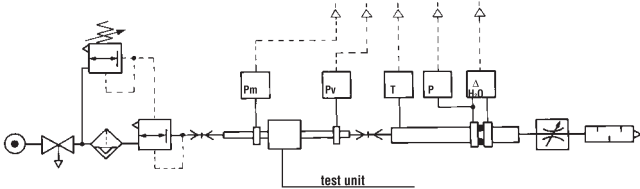

• Flow tests carried out at the Department of Mechanics, Turin Polytechnic, using the computerized test bench following CETOP RP50R recommendations (ISO DIS 6358-2-approved) with ISO 5167 diaphragm gauge.

- (A) = 2 bar - 0,2 MPa - 29 psi
- (B) = 4 bar - 0,4 MPa - 58 psi
- (C) = 6 bar - 0,6 MPa - 87 psi
- (D) = 8 bar - 0,8 MPa - 116 psi
- (E) = 10 bar - 1 MPa - 145 psi



LUB 1/4

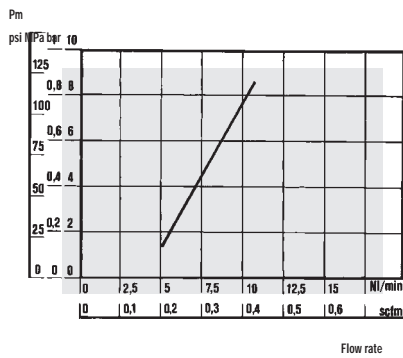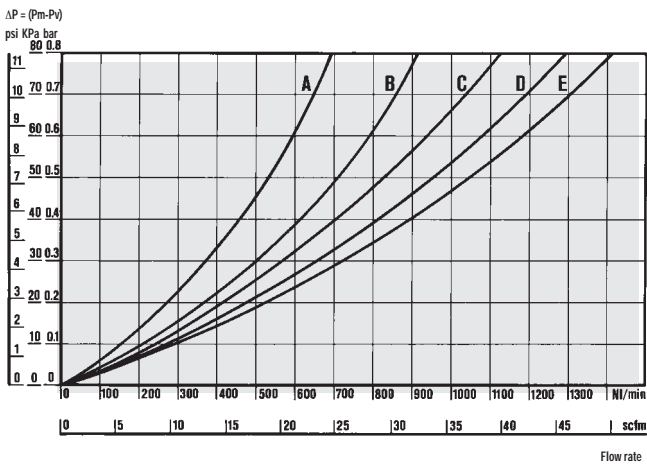

• MINIMUM ACTIVATION FLOW CHARTS

The minimum activation flow charts were carried out in compliance with ISO/DP 6301/2



LUB 3/8 - 1/2

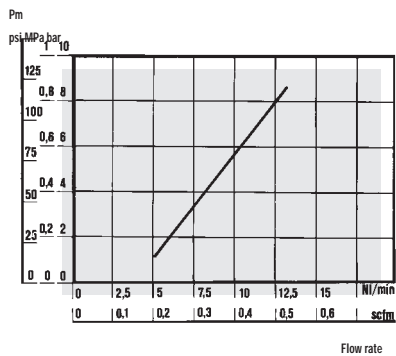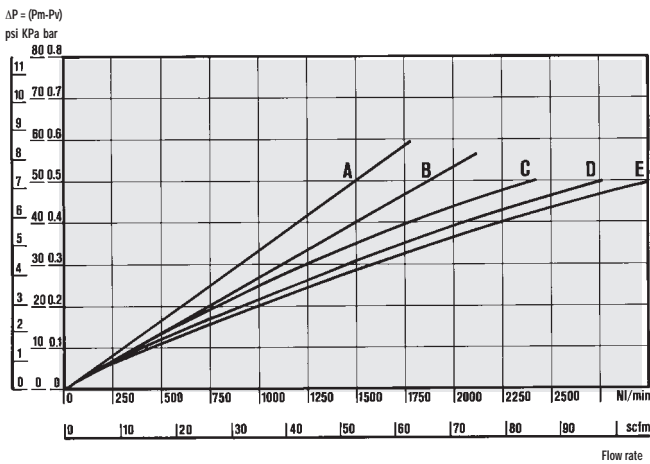

• MINIMUM ACTIVATION FLOW CHARTS

The minimum activation flow charts were carried out in compliance with ISO/DP 6301/2

LUB 3/4 - 1"

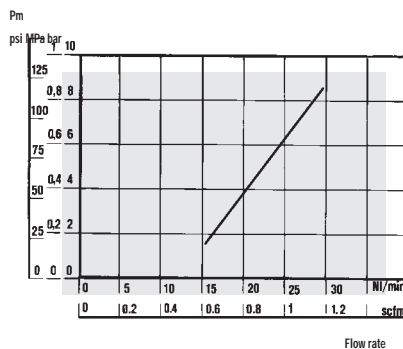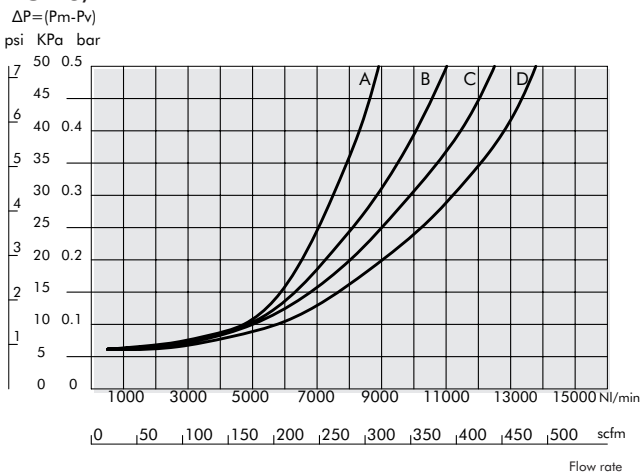

• MINIMUM ACTIVATION FLOW CHARTS

The minimum activation flow charts were carried out in compliance with ISO/DP 6301/2

